

## Description

The Smart Power Relay E-1048-8S. is a remotely controllable electronic load disconnecting relay with two functions in a single unit:

- electronic relay
- electronic overcurrent protection

A choice of current ratings is available from 1 A through 30 A. An operating voltage range of DC 9...32 V allows the connection of DC 12 V and DC 24 V loads.

It has been designed for installation in IP-protected enclosures. The optimised design allows reduction of space requirements up to 50 % compared to standard electro-mechanical cubic relays. Power consumption is cut by factor 5 compared to standard electro-mechanical relays and allows gas saving and reduction of emissions.

In order to switch and protect loads remotely, it has until now been necessary to connect several discreet components together:

- an electro-mechanic relay, control cable and integral contact to close the load circuit
- an additional protective element (circuit breaker or fuse) for cable or equipment protection

**Now type E-1048-8S. combines these two functions in a single unit, thus minimising the number of connections in the circuit and thereby reducing the risk of failures.**

## Applications

Type E-1048-8S. is suited to all applications with DC 12 V or DC 24 V circuits, where magnetic valves, motors or lamp loads have to be switched, protected or monitored:

- agricultural and construction machinery,
- road vehicles (utility vehicles, buses, special vehicles)
- rail vehicles
- marine industry (ships, boats, yachts etc.)

The Power Relay is also suitable for industrial use (process control, machine-building, engineering) as an electronic coupling relay between PLC and DC 12 V or DC 24 V load.

## Features

- The E-1048-8Slimline features integral power electronics and provides wear-free switching function, insensitive against shock, vibration and dust.
- Only a fraction of the control power needed by electro-mechanical relays is required for switching loads. This is important for battery buffered load circuits which have to remain controlled even with the generator off line.
- The extremely low induced current consumption of less than 50 µA is absolutely necessary for battery buffered applications.
- The load circuit is disconnected in the event of a short circuit.
- For switching and monitoring loads of 25 A plus it is possible to connect several units in parallel. Uniform power distribution between units must be ensured by symmetrical design of the supply cables (length and cross section).
- Load conditions are visually indicated by a bicolour LED (load activated: yellow LED lighted; load disconnected due to overload or short circuit: red LED lighted).



**E-1048-8S. SLIMLINE-version**

## Technical Data ( $T_{amb.} = 25\text{ °C}$ , $U_N = \text{DC } 24\text{ V}$ )

### Power supply LINE +

Type	DC power supply with small $R_i$ battery and generator etc.
Voltage ratings $U_N$	DC 12 V/DC 24 V
Operating voltage $U_S$	DC 9...32 V

### Load circuit LOAD

Load output	Power MOSFET, high side switching
Max. current rating $I_N$	25 A
Types of loads	resistive, inductive, capacitive, lamp loads, motors (depending on duration of inrush current)
Current rating range $I_N$	1 A...25 A (fixed ratings) $I_N = 1\text{ A...}10\text{ A}$ : see trip curve 1 $I_N = 15\text{ A...}25\text{ A}$ : see trip curve 2
Induced current consumption $I_0$ of the unit (OFF condition)	< 50 µA
Typical voltage drop $U_{ON}$ at rated current $I_N$ (at 25 °C)	

$I_N$	$U_{ON}$	$I_N$	$U_{ON}$
1 A	50 mV	10 A	110 mV
2 A	55 mV	15 A	70 mV
3 A	60 mV	20 A	90 mV
5 A	80 mV	25 A	120 mV
7.5 A	90 mV		

Switching point	typically $1.3 \times I_N$ (-40 °C...+85 °C: $1.1...1.5 \times I_N$ )
Trip time	typically 200 ms with switch-on onto overload and/or load increase on duty; can be modified in relation to specific projects.
Current limitation	$I_N = 1\text{ A...}10\text{ A}$ : typically 60 A $I_N = 15\text{ A...}25\text{ A}$ : typically 200 A short-circuit-proof switching output with overload disconnection after typically 200 ms at $I_{load} > \text{typically } 1.3 \times \text{rated current power transistor} > 150\text{ °C}$
Temperature disconnection reset after disconnection	- resettable via external control signal (low-high) at control input IN+ - reset of supply voltage
Parallel connection of channels	for loads of 25 A plus, several units of identical current ratings may be connected in parallel. To ensure equal distribution of current between units, symmetrical design of the supply feed is necessary (length and cross section).
Leakage current in OFF condition	max. 50 µA
Free-wheeling diode for connected load	integral $I_N = 1\text{ A...}10\text{ A}$ : max. 40 A $I_N = 15\text{ A...}25\text{ A}$ : max. 100 A

## Technical Data ( $T_{amb.} = 25\text{ }^{\circ}\text{C}$ , $U_N = \text{DC } 24\text{ V}$ )

Delay time $t_{on}/t_{off}$ (resistive load)	typically 0.5 ms / typically 1.5 ms (EMC filter in control input)
Short circuit, overload in load circuit	- disconnection of load - no automatic re-start - after remedy of the fault unit has to be reset via control input IN+

### Control input IN+

Control voltage IN+	0...5 V = "OFF", 8.5...32 V = "ON"
Control current $I_E$	typically 1 mA at 12 V / typically 5 mA at 24 V
Reset in the event of a failure	- reset via external control signal (low - high) at control input IN+ - via reset of supply voltage
Rising edge of IN+	< 5 ms

### Visual status indication

control current on (AS)	yellow LED lighted
disconnection overcurrent (SF)	red LED lighted

### General data

#### Reverse polarity protection

Control circuit	yes
Load circuit	no (due to integral free-wheeling diode)

#### Temperature range

ambient temperature	- standard: -40...+85 °C without load reduction
---------------------	---

### Tests

Humid heat	combined test, 9 cycles with functional test
Temperature change	test to DIN EN 60068-2-30, Z/AD min. temperature -40 °C, max. temperature +90 °C
Vibration (random)	test to DIN IEC 60068-2-14, Nb in operation, with temperature change 6 g eff. (10 Hz...2,000 Hz)
Shock	test to DIN EN 60068-2-64 25 g/11 ms, 10 shocks
Corrosion	test to DIN EN 60068-2-27
EMC requirements	test to DIN EN 60068-2-52, severity 3 EMC directive: emitted interference EN 61000-6-3 noise immunity EN 61000-6-2

### Terminals SLIMLINE

4 blade terminals 6.3 mm x 0.8 mm to DIN 46244-A6.3-0.8  
contact material CuZn37F37  
copper-plated and tin-plated  
**mounting:**  
- E-T-A socket type 17-P10-Si (max. load 16 A)  
- on E-T-A socket type 23-P19-Si or 63-P19-Si for pcb mounting  
- on a pc board with 6.3 mm receptacles

### Dimensions of pcb

Mass	approx. 13 g
Approvals, CE	according to EMC directive

## Pin selection SLIMLINE

E-1048-8S.	17-P10-Si	
LINE + (2)	(2) [2(k)]	
GND (5)	(5) [12]	
IN+	(4) [11]	
LOAD (1)	(1) [1]	


## Ordering Information

Type  
E-1048-8S 2 - C3A1 - 4U3 -

### Current ratings


1 A  
2 A  
3 A  
5 A  
7,5 A  
10 A  
15 A  
20 A  
25 A

## Dimensions SLIMLINE

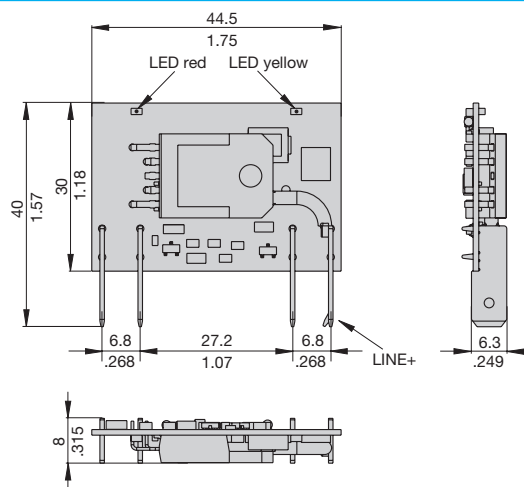

Design: power semiconductor varies depending on the current rating

## Connection diagram SLIMLINE

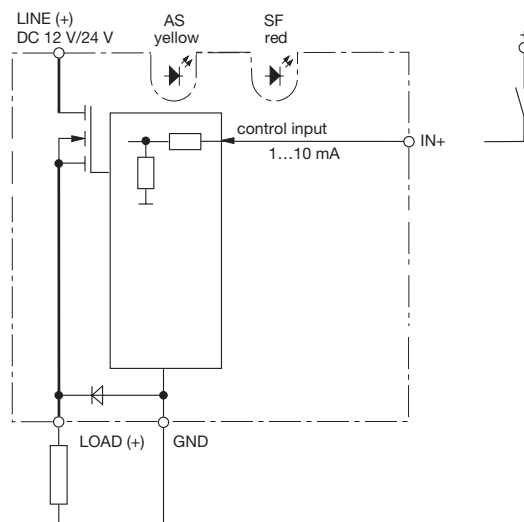


This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

**Typical time/current characteristics (T<sub>A</sub> = 25 °C)**


**Trip curve 1**

1 A, 2 A, 3 A, 5 A, 7,5 A and 10 A (standard 200 ms)

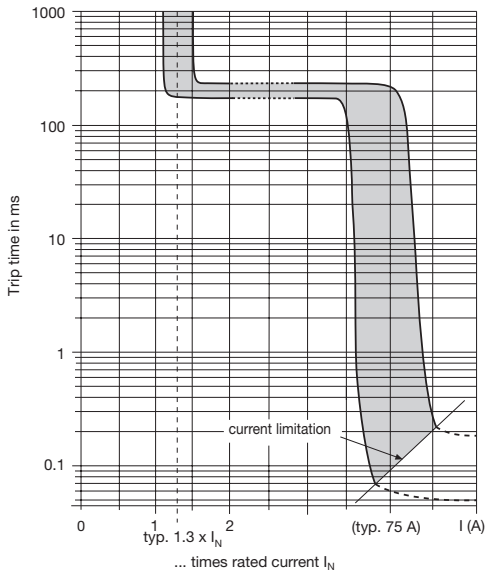

**Trip curve 2**

15 A, 20 A, 25 and 30 A (standard 200 ms)

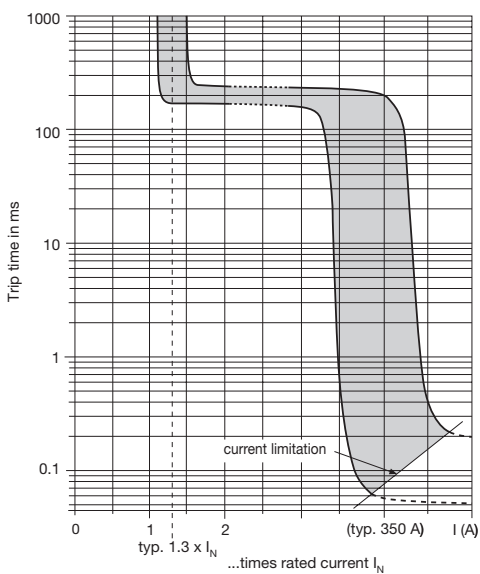

**Accessories for E-1048-8S.**


**2-way mounting socket**

**23-P10-Si**

(retaining clip Y 300 581 03 available on request)

**6-way mounting socket**

**63-P10-Si**

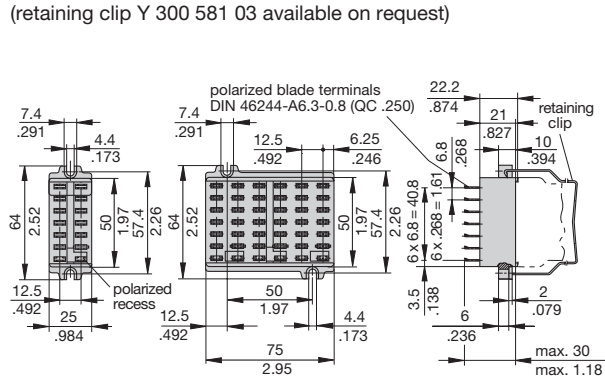

**Accessories for E-1048-8S.**

**Single mounting sockets**

(up to 16 A max. load)

**17-P10-Si**


**17-P70-Si**

(retaining clip Y 300 581 11 available on request)

(with adapter)

**17-P10-Si-20025**

**17-P70-Si-20025**

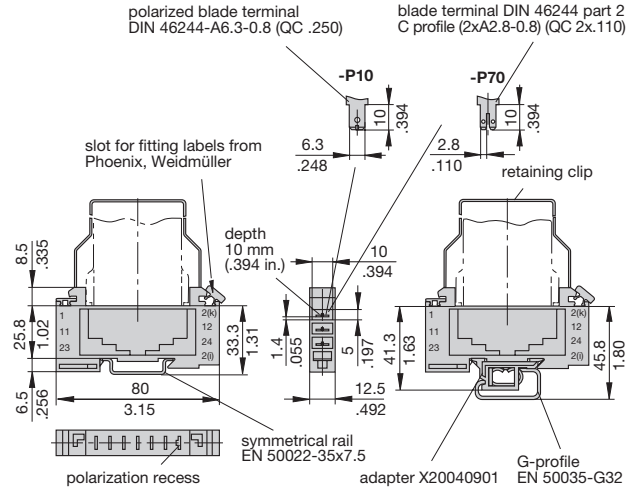

**Busbar (10-way) (supplied as a complete package)**


**for type 17 socket**

(for max. 100 A continuous load),

more positions available on request


**X 211 157 01** with terminal

**X 211 157 02** without terminal

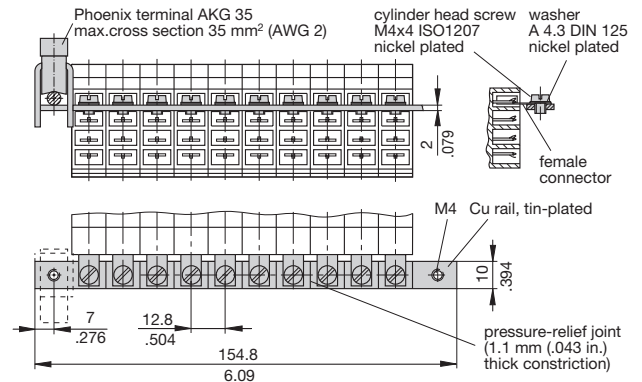

**Insulating sleeving for busbar (10-way)**

**Y 303 824 01**



**Connector bus links -P10**

**X 210 588 01/** 1.5 mm<sup>2</sup>, (AWG 16), brown (up to 13 A max. load)

**X 210 588 02/** 2.5 mm<sup>2</sup>, (AWG 14), black (up to 20 A max. load)

**X 210 588 03/** 2.5 mm<sup>2</sup>, (AWG 14), red (up to 20 A max. load)

**X 210 588 04/** 2.5 mm<sup>2</sup>, (AWG 14), blau (up to 20 A max. load)

