

## Description

The E-T-A Solid State Remote Power Controller E-1071-343 is a double relay with protective function both for resistive and inductive **DC 48 V** loads. It is particularly suitable to control upward/downward and forward/backward movements. **Failure of one channel will also cause the other channel to disconnect.**

## Typical applications

- Valve timing gears for forward/backward or upward/downward movements (overlapping operation is possible)
- Parallel circuits which must be completely disconnected after failure of one of the circuits.

## Features

- Small double relay with protective function
- Overcurrent and short-circuit proof outputs
- Two pole physical isolation of both channels
  - approx. 5 s after electronic fault disconnection
  - by manual release
- Both part units are disconnected upon isolator tripping
- Current load of each unit: max. 3 A; total current max. 4 A
- Electrical isolation between control and load circuit by means of opto coupler
- Control current indication by RED LED
- Load current indication by GREEN LED
- With auxiliary contact (fault indication)
- Temperature disconnection

## Ordering information

Type No.	
E-1071	SSRPC
	343 double unit
	Voltage rating of load
	DC 48 V
	Current rating
	3 A / 3 A
E-1071 -	343 - DC 48 V - 3 A / 3 A ordering example



**E-1071-343**

## Technical data ( $T_{\text{ambient}} = 25\text{ °C}$ , $U_S = \text{DC } 48\text{ V}$ )

Voltage rating $U_N$	DC 48 V
Operating voltage $U_S$	DC 36...60 V
Current rating $I_N$	3 A/3 A (2 A + 2 A)
Current consumption ( $U_S = \text{DC } 48\text{ V}$ , $U_{\text{Contr}} = \text{"0"}$ )	typically 21 mA
Residual ripple for all voltages	max. 5 % (3 phase bridge)
Reverse polarity protection	$U_S$ (terminals 1 and 2)
Physical isolation	2-pole
	- by manual circuit breaker release
	- approx. 5 s after overload disconnection
	- upon thermal response (approx. +130 °C)

### Load circuits (I/II)

Load output	NPN transistor, minus switching
Load rating	DC 48 V/0.2...3 A per channel with parallel duty of both channels: max. 4 A (e. g. 2 A + 2 A)
	max. 1.8 V
Voltage drop at $I_N$	approx. $1.1 \times I_N$
Overload disconnection	typically 20 ms (see storage time curve)
Storage time $t_S$ (at $2 \times I_N$ )	approx. $2.5 \times I_N$
Short-circuit limitation	approx. 4 $\mu\text{s}$
Short-circuit response delay	GREEN LED lights at $I_{\text{load}} > 0.1\text{ A}$
Load current monitoring	3 x 4 mm dia. (shunt $0.1\ \Omega \pm 1\%$ )
Current measuring terminals	max. 3 mA
Leakage current ( $U_{\text{Contr}} = \text{"0"}$ )	integral
Free-wheeling diode	

### Control circuits (I/II)

Control	opto coupler in control input
Control voltage $U_{\text{Contr}}$	"0" = 0...5 V
	"1" = 8.5...35 V
Control current	typically 5 mA
Switching frequency $f_{\text{max}}$	100 Hz
Control signal ( $U_{\text{Contr}} = \text{"1"}$ )	RED LED lights ( $I_S$ flowing)
Protection	reverse polarity protection (diode)

### Signal output

Fault indication	auxiliary contact (N/O)
	- max. DC 30 V/3 A
	- physically isolated
	- closed when the circuit breaker has tripped

### General data

Ambient temperature	0...+60 °C (without condensation)
Terminals	screw terminals $2 \times 2.5\text{ mm}^2$ to DIN 46288
Housing	clamping plate: polycarbonate GV, blue cover: polycarbonate, black
Mounting	symmetric rail to EN 50022-35
Self-extinguishing properties	to UL 94: V = 0; VDE 0304: grade 1
Degree of protection (IEC 529/DIN 40050)	IP20 housing, terminals
Mounting dimensions	45 x 74 x 128 mm
Mass	approx. 320 g

## Technical description

Under normal operating conditions, the E-T-A SSRPC E-1071-343 allows the connection and disconnection of the load outputs of two channels independent of each other.

### Control circuits (I/II)

The control current flows through the LED and the opto coupler immediately a voltage higher than 8.5 V ( $\hat{=}$  control signal "1") is applied at the input terminals (6 and 7, or 10 and 7). The opto coupler transmits the signal to the load circuit, at the same time switching the load transistor on. This signal is transmitted as a status signal to all monitoring circuits. The input protection diode protects the control voltage from incorrect polarization. Control current limitation is provided by a constant current diode.

### Load circuits (I/II)

The load circuit is switched ON or OFF according to the control signal ("0" or "1"), with electronic circuits monitoring the load circuit for faults such as overload or short-circuit. Should one of these faults occur, the monitoring circuitry will immediately react, causing the load transistor to disconnect and the circuit breaker to trip. Transistor disconnection occurs according to the storage time characteristics. The storage time increases noise immunity avoiding disconnection of non-harmful peaks such as those caused by inrush currents from lamp load connection. Storage time is not a constant quantity but is inversely proportional to the overcurrent factor.

After expiration of the storage time (see diagram) the load circuit transistor will become non-conductive. After approx. 5 s the isolator will switch off so as to disconnect the two load circuits. The common auxiliary contact closes signalling the fault. After removal of the fault, the SSRPC can be reactivated by pushing the isolator button.

### Status outputs

Status indication is provided by 4 LEDs (2 x RED, 2 x GREEN).

#### RED LED

##### ON indication (I/II)

The red LED indicates when the control voltage is higher than 8.5 V, with control current flowing.

#### GREEN LED


##### Current flow indication (I/II)

The green LED indicates when the load current is above 0.1 A.

Faults such as too high a resistance, wire break, poor contact, or overload/short-circuit, are available when only the red LED indicates.

The SSRPC E-1071-343 includes three current measuring terminals (4 mm dia.) on the front. These terminals provide for load current measurement in terms of voltage drop at the 0.1  $\Omega$  shunt in the load circuit (I/II).

## Storage time characteristic curve $t_s$ ( $T_A = 25^\circ\text{C}$ )

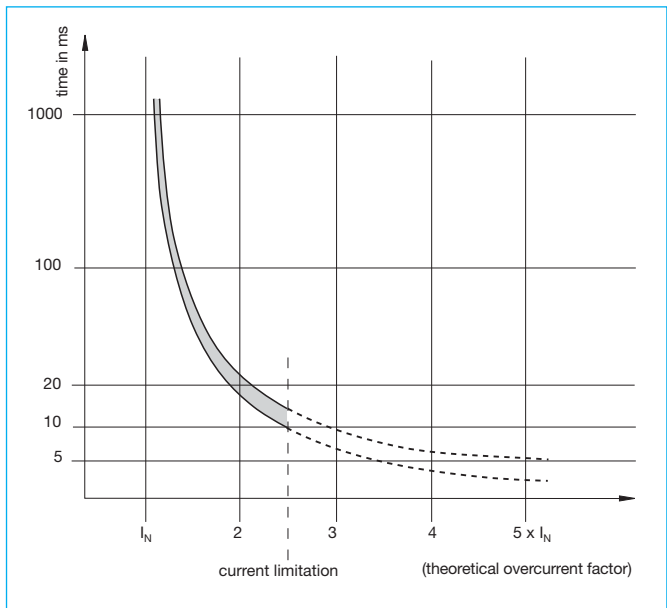


## Operating modes

Operating status	Fault-free operation		Short-circuit on the load	Wire break	
	"0"	"1"		"0"	"1"
Control input	"0"	"1"	"1"	"0"	"1"
RED LED - Control current	0	1	1	0	1
GREEN LED - Load current monitoring	0	1	0	0	0
Auxiliary contact	open	open	closed	open	open
Remarks	load OFF	load ON	both load circuits disconnected		


1 - LED indicates  
0 - LED does not indicate

## Dimensions

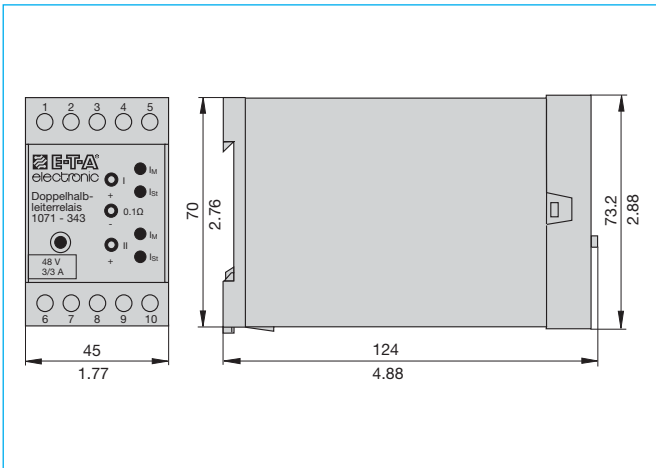


This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )

## Basic circuit diagram

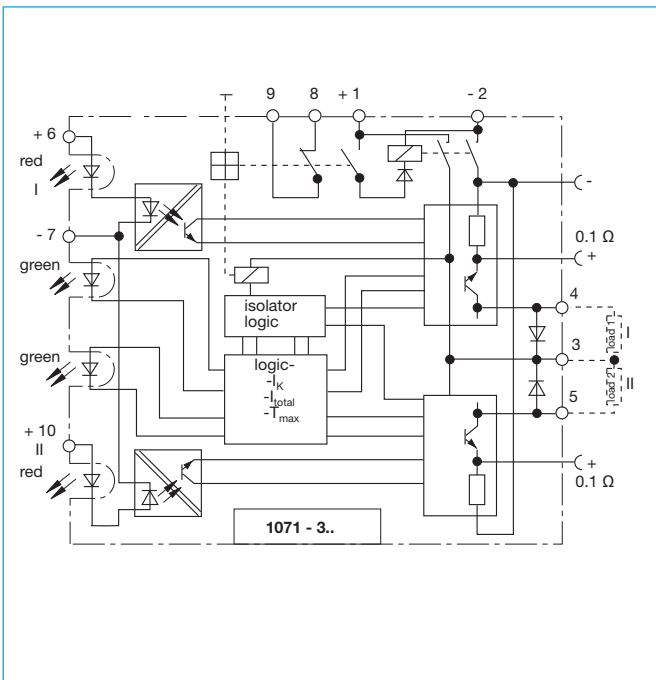

## Terminal selection

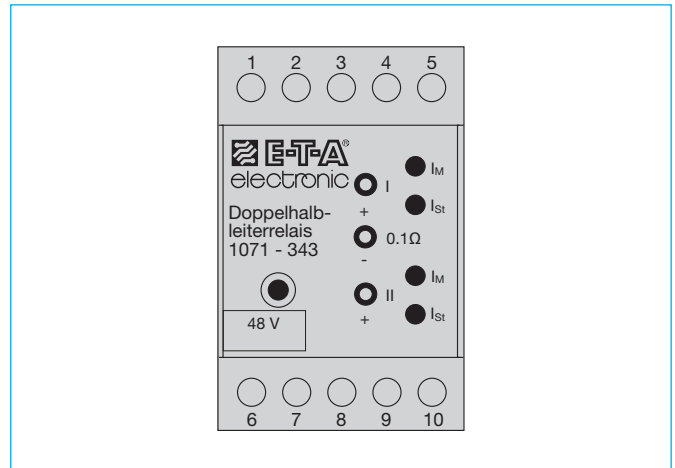

### Terminal

- 1 operating voltage  $+U_S$ : DC 36..60 V
- 2 operating voltage  $-U_S$
- 3 load (+) (carrying plus potential)  
**CAUTION:** Do not connect to GND/ $-U_S$
- 4 load I (-)
- 5 load II (-)
- 6 control voltage I  $+U_{Contr}$ : max. DC 35 V
- 7 control voltage I, II  $-U_{Contr}$
- 8 auxiliary contact
- 9 auxiliary contact
- 10 auxiliary voltage II  $+U_{Contr}$ : max. DC 35 V