

## Description

Single pole thermal circuit breaker with push-to-reset, tease-free, trip-free, snap action mechanism (R-type TO CBE to EN 60934). Available in versions for threadneck panel mounting, plug-in or integral mounting. The optional -KF housing is particularly suited to high humidity and other damp conditions. Approved to CBE standard EN 60934 (IEC 60934).

## Typical applications

Motors, transformers, solenoids, extra low voltage wiring systems.

## Ordering information

### Type No.

**157** threadneck panel mounting\*  
**158** integral or plug-in mounting

### Terminal design

**P10** blade terminals A6.3-0.8 (QC .250)

**K10** screw terminals M4x6

### Special housing (optional)

**KF** for tropical and high humidity conditions

### Current ratings

0.05...25 A


**157 - P10 - .. - 10 A** = ordering example

The exact part number required can be built up from the table of choices shown above. Ordering references for optional features should be omitted if not required.

\*mounting hardware bulk shipped

## Standard current ratings and typical internal resistance values

| Current rating (A) | Internal resistance (Ω) | Current rating (A) | Internal resistance (Ω) |
|--------------------|-------------------------|--------------------|-------------------------|
| 0.05               | 280                     | 3                  | 0.1                     |
| 0.08               | 100                     | 3.5                | 0.06                    |
| 0.1                | 110                     | 4                  | 0.06                    |
| 0.2                | 29                      | 4.5                | 0.05                    |
| 0.3                | 14                      | 5                  | 0.05                    |
| 0.4                | 7                       | 6                  | 0.02                    |
| 0.5                | 4.9                     | 7                  | 0.02                    |
| 0.6                | 3.4                     | 8                  | 0.02                    |
| 0.7                | 2.5                     | 10                 | < 0.02                  |
| 0.8                | 1.8                     | 12                 | < 0.02                  |
| 1                  | 1.2                     | 13                 | < 0.02                  |
| 1.2                | 0.8                     | 15                 | < 0.02                  |
| 1.5                | 0.6                     | 16                 | < 0.02                  |
| 1.8                | 0.2                     | 20                 | < 0.02                  |
| 2                  | 0.3                     | 22                 | < 0.02                  |
| 2.5                | 0.2                     | 25                 | < 0.02                  |

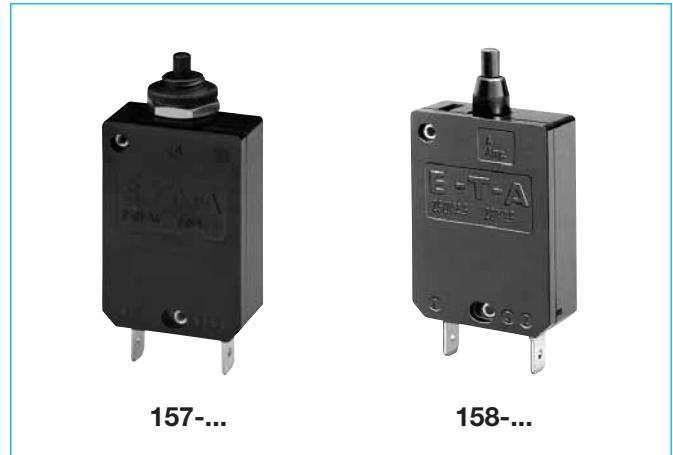

## Technical data

For further details please see chapter: Technical Information


|   |  |
|---|--|
| Voltage rating  | AC 250 V; DC 28 V<br>(UL: AC 250 V; DC 50 V)   |
| Current ratings   | 0.05...25 A  |
| Typical life  | 0.05...16 A 5,000 operations at 2 x I <sub>N</sub> , inductive<br>17...25 A 5,000 operations at 2 x I <sub>N</sub> , resistive |
| Ambient temperature                                       | -20...+60 °C (-4...+140 °F)  |
| Insulation co-ordination (IEC 60664 and 60664 A)          | rated impulse withstand voltage 2.5 kV<br>pollution degree 2<br>reinforced insulation in operating area                        |
| Dielectric strength (IEC 60664 and 60664A) operating area | test voltage AC 3,000 V  |
| Insulation resistance                                     | > 100 MΩ (DC 500 V)  |
| Interrupting capacity I <sub>cn</sub>                     | 0.05...2.5 A 8 x I <sub>N</sub><br>3...5 A 20 x I <sub>N</sub><br>6...12 A 200 A<br>13...25 A 400 A                            |
| Degree of protection (IEC 60529/DIN 40050)                | operating area IP40<br>terminal area IP00  |
| Vibration   | 8 g (57-500 Hz) ± 0.61 mm (10-57 Hz) to IEC 60068-2-6, test Fc, 10 frequency cycles/axis                                       |
| Shock   | 25 g (11 ms) to IEC 60068-2-27, test Ea  |
| Corrosion   | 96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka  |
| Humidity  | 240 hours at 95 % RH to IEC 60068-2-78, test Cab   |
| Mass  | approx. 24 g   |

## Approvals


| Authority      | Voltage ratings   | Current ratings |
|----------------|-------------------|-----------------|
| VDE (EN 60934) | AC 250 V; DC 28 V | 0.05...25 A     |
| CSA, UL        | AC 250 V          | 0.1...16 A      |
| CCC            | AC 250 V          | 0.05...25 A     |

## Dimensions


### 157-P10

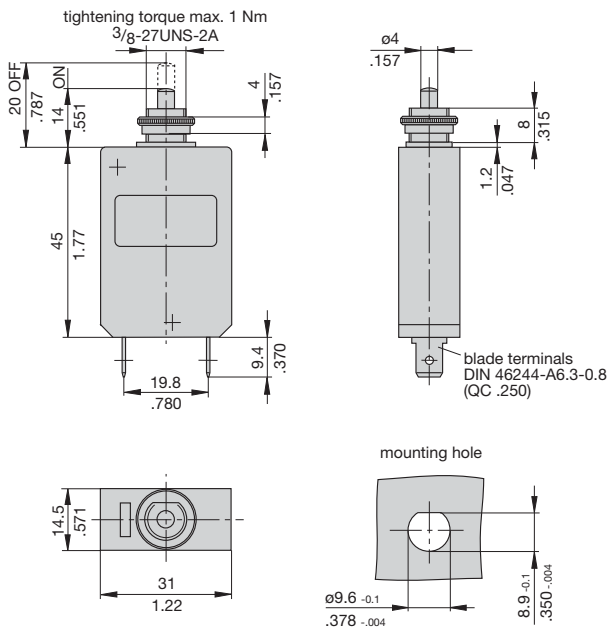


### 158-P10

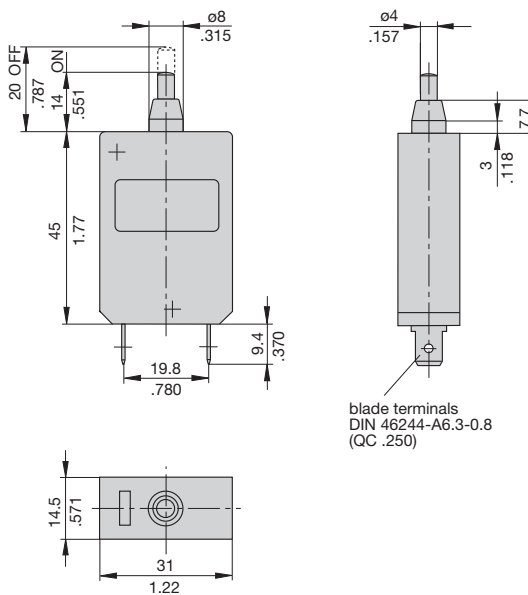


### 157/158-K10

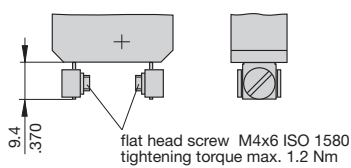

## Internal connection diagram




## Typical time/current characteristics at +23 °C/+73.4 °F

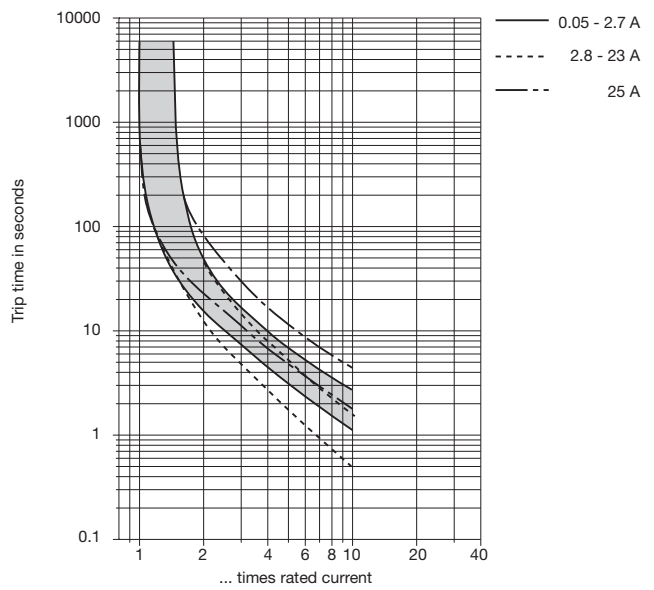

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.

| Ambient temperature °F | -4   | +14  | +32  | +73.4 | +104 | +122 | +140 |
|------------------------|------|------|------|-------|------|------|------|
| °C                     | -20  | -10  | 0    | +23   | +40  | +50  | +60  |
| Derating factor        | 0.76 | 0.84 | 0.92 | 1     | 1.08 | 1.16 | 1.24 |

## Installation drawings

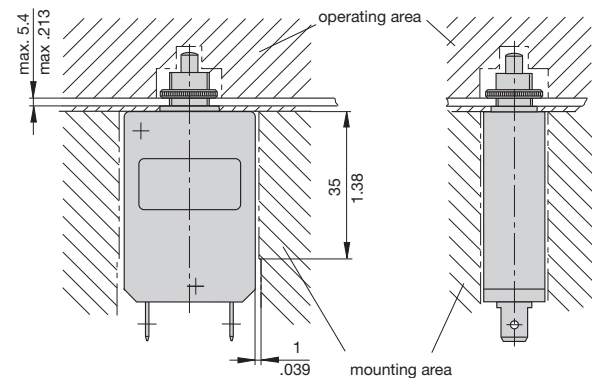


This is a metric design and millimeter dimensions take precedence (mm)  
inch


## Accessories

### Mounting sockets


**10F-P10** (up to 16 A max. load)

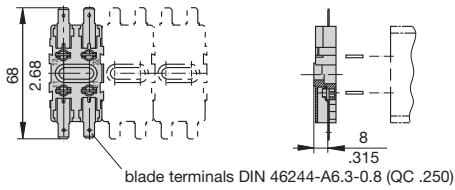

**10F-K10** (up to 20 A max. load)

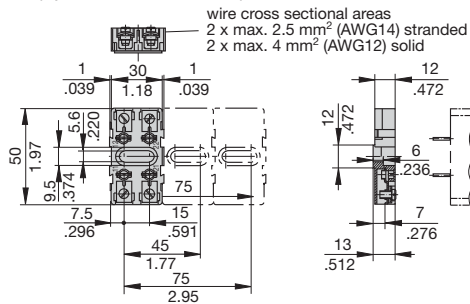


**10F-A10** (up to 16 A max. load)

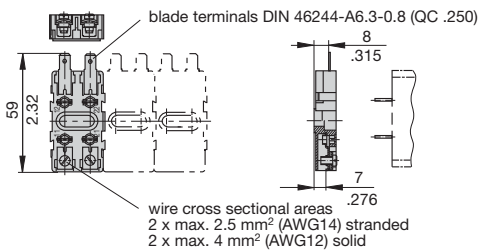


### Accessories for sockets (up to 20 A max. load)

2-way bus bar **Y 301 166 02** 4-way bus bar **Y 301 166 01**

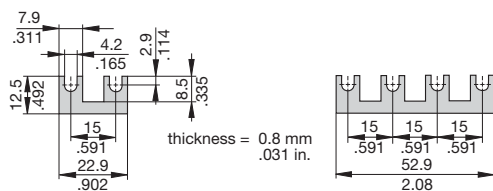


### Connector bus links -K10

**X 210 589 01/** 2.5 mm<sup>2</sup> (AWG 14), black (up to 20 A max. load)  
**X 210 589 02/** 1.5 mm<sup>2</sup> (AWG 16), brown (up to 13 A max. load)

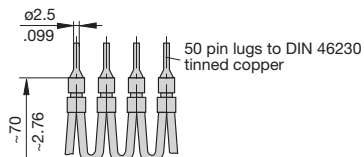


### Connector bus links -P10

**X 210 588 01/** 1.5 mm<sup>2</sup> (AWG 16), brown (up to 13 A max. load)  
**X 210 588 02/** 2.5 mm<sup>2</sup> (AWG 14), black (up to 20 A max. load)  
**X 210 588 03/** 2.5 mm<sup>2</sup> (AWG 14), red (up to 20 A max. load)  
**X 210 588 04/** 2.5 mm<sup>2</sup> (AWG 14), blue (up to 20 A max. load)

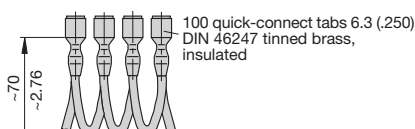


## Accessories for type 157-...


**Front panel water splash cover, transparent Y 300 538 01 and knurled nut Y 300 628 01 X 200 799 01 (bonded to nut) (IP64)**



**Front panel water splash cover, transparent with special knurled nut X 200 798 02 (bonded to nut) (IP64)**



**Splash cover (black) with hex nut X 210 739 01**



This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.